Microflex® 93-853

⊗ **Single Use**   (NBR) **Nitrile**   **Splash**

High Risk Exam Nitrile Gloves

DESCRIPTION

- Extended cuff provides additional protection for the wrist and arm for hazardous environments. Advanced nitrile formulation offers up to 3 times the puncture resistance of latex or vinyl disposable gloves. Combined with the lowest acceptable pinhole rates (AQL 0.65) these gloves help set a new standard in protection.
- Non-stick properties are built into the glove formulation to create a resistance to tape or adhesives, and to assist workers with improved efficiency and speed.
- Textured fingers ensure strong, efficient grip and excellent worker protection.
- Constructed without natural rubber latex materials or powder to help protect from allergies, skin irritation and dryness.
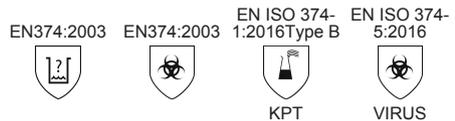
IDEAL APPLICATIONS

- Analytical testing/Measurements
- Assembly and inspection
- Emergency services
- Laboratory analysis
- Laboratory testing
- Maintaining equipment & instruments
- Paint and spray shops
- Patient examinations
- Pharmaceutical manufacturing
- Preparing pharmaceutical products
- Printing industry
- Protection from blood and other bodily fluids

PRIMARY INDUSTRIES

STANDARDS AND CERTIFICATIONS

EN374:2003   EN374:2003   EN ISO 374-1:2016Type B   EN ISO 374-5:2016
KPT   VIRUS

CATEGORY III

EXTRA FEATURES

Antistatic

PRODUCT DETAILS

Coating material	Nitrile
Grip design	Textured Fingers
Cuff style	Beaded
Thickness (mm)	0.14
Extra features	Antistatic
Colour	Blue
AQL	0.65
EN Sizes	5.5 - 6,6.5 - 7,7.5 - 8,8.5 - 9,9.5 - 10,10.5 - 11,11.5 - 12
Length (mm)	295

PACKAGING

500 gloves per shipper carton; 50 gloves per dispenser; 10 dispensers per shipper carton Size 11.5-12: 400 gloves per shipper carton; 40 gloves per dispenser

Ansell