




# PRODUCT DATA SHEET

## P7R Core

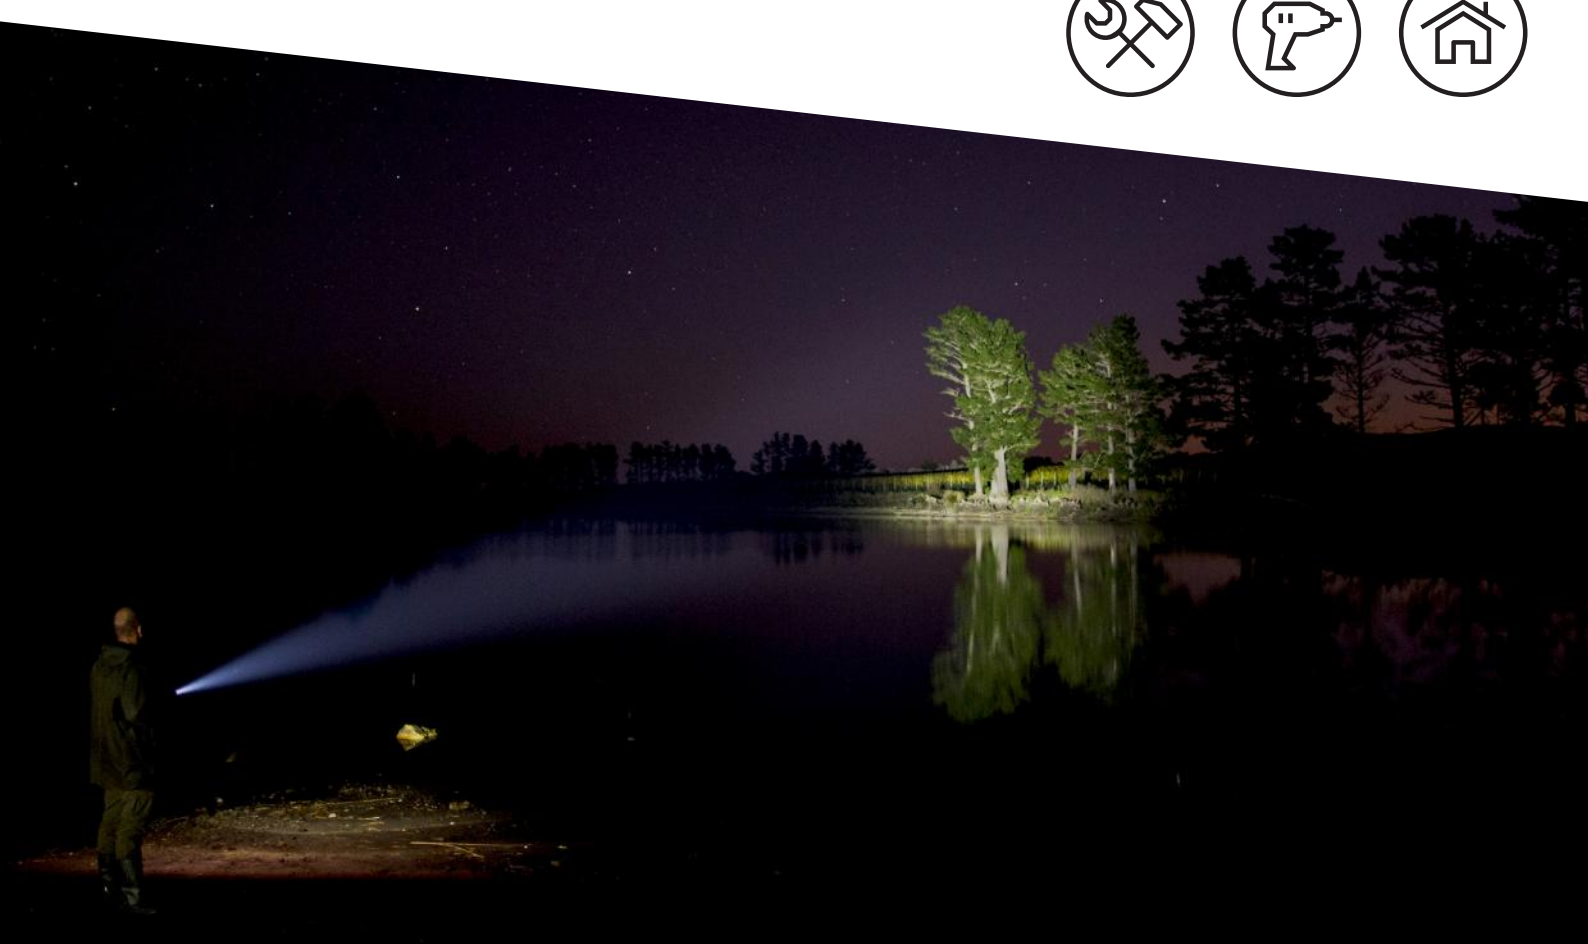

# P7R Core

## PRODUCT DESCRIPTION

The versatile P7R Core flashlight offers exceptional power and forward-thinking technologies like the Smart Light Technology for custom light functions. The lamp is powered by a 21700 Lithium-ion battery, which can be easily changed by opening the end cap. Thanks to our Flex Sealing Technology, the P7R Core is protected against water and dust, and can even be used underwater for a short time. Our patented<sup>3</sup> Advanced Focus System works with up to one meter of water depth. This makes the P7R Core the ideal flashlight for every occasion.

- Advanced Focus System for efficient, precise flood and spot lighting
- Smart Light Technology for custom light functions
- High protection against dust and water (IP68) through Flex Sealing Technology
- Constant Light for constant luminous flux over a long period of time
- Convenient charging of the battery with Magnetic Charge System

### TECHNICAL DATA

Length defocused [mm]	158
Length focused [mm]	165
Head diameter [mm]	35
Tube diameter [mm]	27
Weight incl. batteries [g]	202
Weight without batteries [g]	131
Focus function	Yes
Head material	Aluminum alloy
Tube material	Aluminum alloy
Optic	Plastic lense (PMMA)
Cartridge	No

### POWER SUPPLY

Power source type	Rechargeable battery
Battery quantity	1
Battery type	Li-ion
Battery replaceable	Yes
Total battery voltage [V]	3.7
Total battery capacity [mAh]	4800
Total battery energy <sup>2</sup> [Wh]	17.76
Rechargeable	Yes
Charging time <sup>5</sup> [min]	270
Energy modes	Constant Light
Energy status indicator	Battery Indicator, Charge Indicator, Low Battery Warning

### FURTHER SPECIFICATIONS

IP class	IP68
Drop test (drop height) [m]	2
Working temperature range [°C]	-20 to +40

### LIGHT FUNCTIONS

Blink, Boost, Low Power, Mid Power, Power, Position, S.O.S., Strobe

### LIGHT SOURCE

Amount LEDs	1
LED type	Xtreme LED
Color	White
Color temperature [K]	6000 to 7500
Color rendering index (CRI)	70

### LIGHT VALUES

ANSI – Constant Light	Boost	Power	Mid Power	Low Power
Light output <sup>1</sup> [lm]	1400	1000	440	15
Beam distance <sup>1</sup> [m]	300	210	130	15
Run time <sup>1</sup> [h]		2	4	90

### SWITCH

Front Switch

### FEATURES

Dimmable , Transportation lock , Flicker Free, Memory Function, Back-Up Light

### TECHNOLOGIES

Advanced Focus System<sup>3</sup>, Smart Light Technology, Magnetic Charge System, Emergency Light, Temperature Control System, Flex Sealing Technology, Multi-Core Optics

# P7R Core

## PACKAGING AND LOGISTICS



### PACKAGING INFORMATION

Type of packaging	Box
Scope of delivery	1 set of rechargeable batteries, Hand strap, Magnetic charging cable
Item No.	502181
Customs tariff number	8513100000
Color	black
MSRP price (€)	99.90

### SINGLE PACKAGE

Dimensions W x H x D [cm]	7.2 x 21 x 8.5
Gross weight [g]	358
GTIN-13	4058205020510

### EXPORT CARTON

Unit	24
Dimensions W x D x H [cm]	45.5 x 29 x 34
Gross weight [kg]	9.33
GTIN-13	4058205020534

# P7R Core

## ACCESORIES

PRODUCT CATEGORY	ITEM NUMBER	PRODUCT NAME	MSRP
Fastenings / Brackets	0362	Universal Mounting System	14.90 €
Color filter / Signal caps	502238	Color Filter Set 35.1mm	19.90 €
Color filter / Signal caps	502237	Signal Cone 35.1mm	9.90 €
Color filter / Signal caps	502243	Signal Cone W 35.1mm	9.90 €
Pouches / Holster	0342	Pouch Type G	9.90 €
Fastenings / Brackets	502251	Lamp Adapter Type D	4.90 €
Fastenings / Brackets	7799-PT	Universal Mounting Bracket Type B	15.90 €
Charger / Cable	502258	Wall Mount Type B	9.90 €
Charger / Cable	502260	Charging Station Type B	12.90 €
Battery	502262	21700 Li-ion rechargeable battery 4800mAh	24.90 €
Charger / Cable	502265	Magnetic Charging Cable Type A	6.90 €
Charger / Cable	0380	USB Car Charger	9.90 €
Charger / Cable	502271	USB Adapter 2.4A	14.90 €
Pouches / Holster	502263	Case Type A	24.90 €
Pouches / Holster	502264	Case Type B	24.90 €

# P7R Core

## PRODUCT SERIES

The robust and reliable Ledlenser P-series flashlights offer great performance in a stylish design. Externally reduced to the essentials, they are packed with many useful technologies, such as the patented<sup>3</sup> Advanced Focus System or the advanced Smart Light Technology for individual programmability. Almost all products are protected against dust and water thanks to the innovative Flex Sealing Technology. The new P-series is also the first Ledlenser range of flashlights designed for all user fields. The products of the Core, Work, and Signature range have different designs and are therefore tailor-made for different target groups.

Our Core collection is at the heart of our new P-series lights. Perfect for everyday use in home and garden, for crafts and industry, but also for many recreational applications. The lamps of the Core range offer innovative technologies and functions as well as great performance for the price.

---

## FOOTNOTES

The information pertaining to scope of delivery, appearance, performance, dimensions and weight corresponds to the information available at the time of publication. In the interest of product development, we reserve the right to change scope of delivery, appearance, design and color without prior notice. Product images may vary from the actual products and may show optional accessories which can be purchased separately. Errors and omissions excepted.

1) Measurement values according to ANSI FL1 in the respective setting. If no setting is explicitly indicated, the values refer to luminous flux (lumens/lm) and lighting range (meters/m) on the highest setting, and to battery duration (hours/h) on the lowest setting. A boost function (if available) can be used several times, but only for short periods of time. If the light is equipped with (a) colored LED(s), the measurement values are given for the white light or the white LED. If the light has different energy modes, the measurement is made based on the "energy saving mode".

2) Calculated capacity value in watt-hours (Wh). This applies to the delivery state of the battery/ies inside the respective item, or for lights with rechargeable battery/ies, to the rechargeable battery/ies inside the product when fully charged.

3) EP Patent 1880139, US Patent 7,461,960

5) Charging time varies by hardware used.